
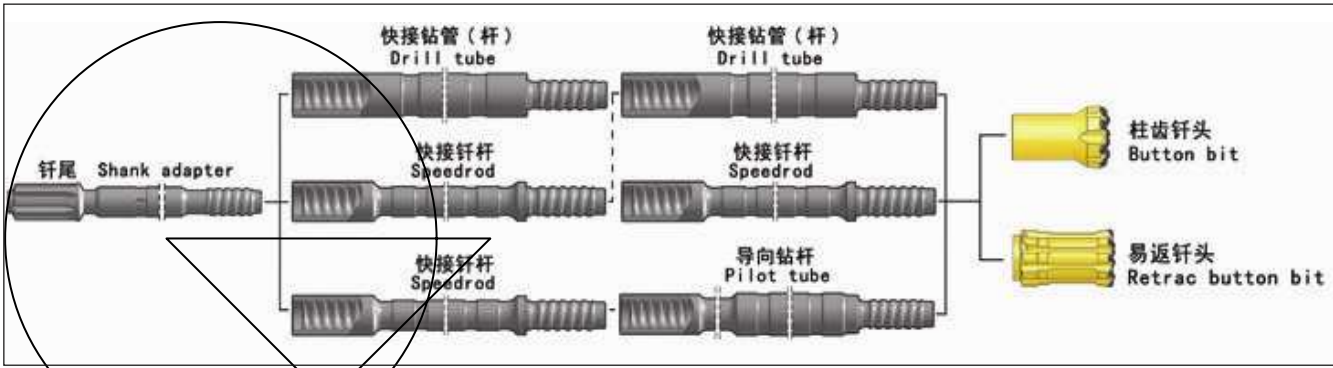
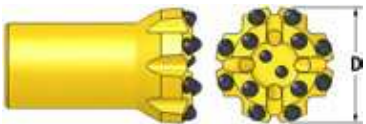
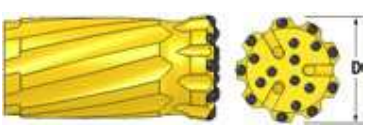
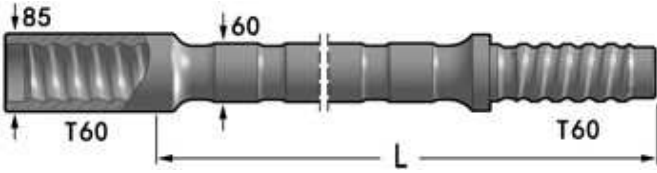
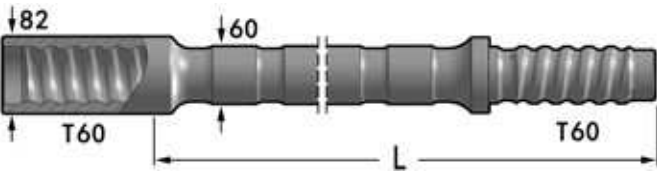


# Bench Drilling T60

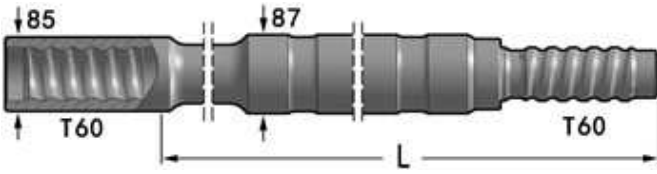

Drill bit	Diameter		No×button diameter			Flushing hole		Weight approx kg	
	mm	inch	Front	Gauge	Angle	Front	Side		
<b>Button bit</b> 	Spherical buttons								
	92	3 5/8	4×13,1×13	8×13	35°	4	-	5.3	
	96	3 3/4	4×13,1×13	8×14	35°	4	-	5.6	
	102	4	9×11	9×13	35°	3	-	6.0	
	115	4 1/2	10×12	9×14	35°	3	-	6.8	
	127	5	10×13	9×14	35°	3	-	7.5	
	140	5 1/2	10×14	9×16	35°	3	-	9.0	
	152	6	12×14	9×16	35°	3	-	10.6	
	Parabolic buttons								
	92	3 5/8	4×13,1×13	8×13	35°	4	-	5.3	
	96	3 3/4	4×13,1×13	8×14	35°	4	-	5.6	
	102	4	9×11	9×13	35°	3	-	6.0	
	115	4 1/2	10×12	9×14	35°	3	-	6.8	
	127	5	10×13	9×14	35°	3	-	7.5	
140	5 1/2	10×14	9×16	35°	3	-	9.0		
152	6	12×14	9×16	35°	3	-	10.6		
<b>Retrac button bit</b> 	Spherical buttons								
	92	3 5/8	9×12	9×12	40°	2	-	5.4	
	96	3 3/4	9×12	9×12	40°	2	-	6.3	
	102	4	10×12	9×13	40°	2	-	7.3	
	115	4 1/2	10×12	9×14	35°	3	-	9.8	
	118	4 5/8	6×13	9×16	35°	3	-	10.0	
	127	5	10×13	9×14	35°	3	-	12.0	
	140	5 1/2	10×14	9×16	35°	3	-	14.0	
	152	6	12×14	9×16	35°	3	-	16.0	
	Parabolic buttons								
	92	3 5/8	9×12	9×12	40°	2	-	5.4	
	96	3 3/4	9×12	9×12	40°	2	-	6.3	
	102	4	10×12	9×13	40°	2	-	7.3	
	115	4 1/2	10×12	9×14	40°	3	-	9.8	
118	4 5/8	6×13	9×16	35°	3	-	10.0		
127	5	10×13	9×14	35°	3	-	12.0		
140	5 1/2	10×14	9×16	35°	3	-	14.0		
152	6	12×14	9×16	35°	3	-	16.0		

# Bench Drilling T60

Drill rod	Length		Diameter		Weight approx kg
	mm	Foot	mm	inch	
MF-rod, For bits from 96mm Flushing hole 22.5mm.	3660	12'	60	2 3/8	73.9
	4265	14'	60	2 3/8	85.5
	6095	20'	60	2 3/8	116.6
	4265	14'	64	2 1/2	95.0
					
MF-rod, For bits from 92-115mm Flushing hole 22.6mm.	3660	12'	60	2 3/8	73.9
	4265	14'	60	2 3/8	85.5
	6095	20'	60	2 3/8	116.6
					
Pilot Tube Female end OD 85mm (82mm on 76mm tubes)	1600	5'3"	87	3 1/2	39.0
	4265	14'	87	3 1/2	99.0
	5335	17'6"	76	3	124.9
					
Drill Tube	3660	12'	87	3 1/2	87.8
	4265	14'	87	3 1/2	99.0
