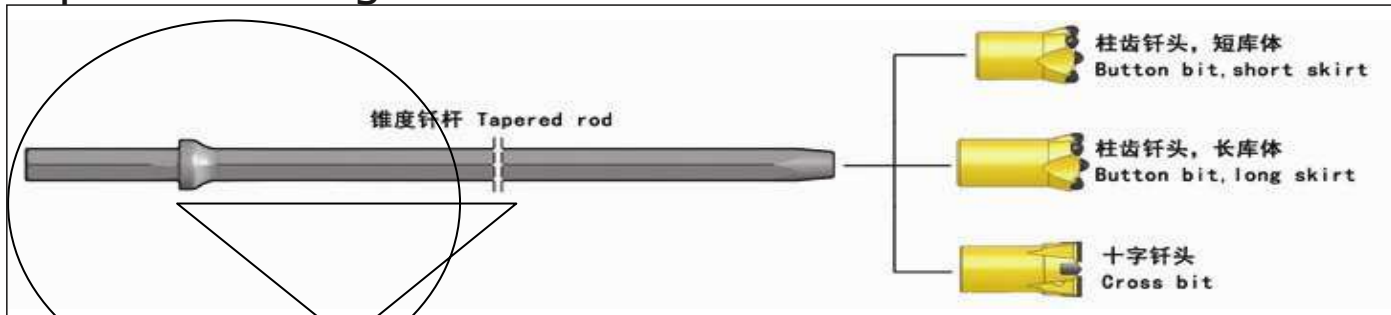
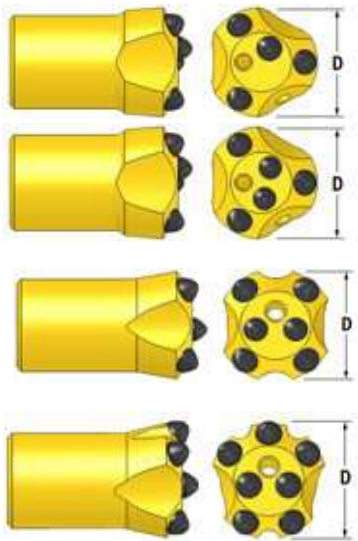
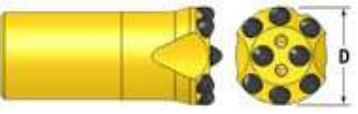

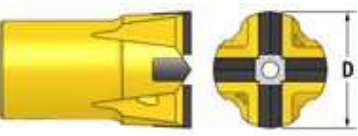
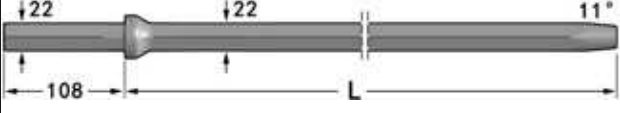


Tapered Drilling Tools 11°



Drill bit	Diameter		Noxbutton diameter			Flushing hole		Weight approx kg
	mm	inch	Front	Gauge	Angle	Front	Side	
Button bit, Short skirt 	32	1 1/4	1×8	3×8	35°	1	2	0.24
	32	1 1/4	2×7	5×7	40°	1	1	0.24
	33	1 19/64	2×7	4×7	40°	1	1	0.25
	34	1 11/32	2×7	4×7	40°	1	1	0.29
	35	1 3/8	2×7	5×7	35°	1	1	0.33
	35	1 3/8	2×7	5×8	35°	1	1	0.33
	36	1 27/64	1×8	3×9	40°	1	1	0.36
	36	1 27/64	2×7	4×7	40°	1	1	0.36
	36	1 27/64	2×7	5×8	35°	1	1	0.36
	38	1 1/2	1×9	3×9	40°	1	1	0.39
	38	1 1/2	2×8	3×9	40°	1	1	0.39
	38	1 1/2	2×7	5×8	35°	1	1	0.39
	38	1 1/2	2×7	5×9	35°	1	1	0.39
	40	1 37/64	1×9	3×9	40°	1	1	0.40
40	1 37/64	2×8	3×9	40°	1	1	0.40	
40	1 37/64	2×9	3×9	40°	1	2	0.40	
40	1 37/64	2×7	5×9	35°	1	1	0.40	
40	1 37/64	2×8	5×9	35°	1	1	0.40	
41	1 5/8	2×7	5×9	35°	1	1	0.41	
Long skirt 	32	1 1/4	2×7	5×7	35°	1	1	0.30
	33	1 19/64	2×7	5×7	35°	1	1	0.31
	33	1 19/64	2×7	6×7	40°	2	1	0.31
	35	1 3/8	2×7	6×7	40°	2	1	0.35
	38	1 1/2	2×7	5×9	35°	1	1	0.41
	35	1 3/8	2×7	5×9	35°	1	1	0.38
	36	1 27/64	2×7	5×9	35°	1	1	0.39
	38	1 1/2	2×7	5×9	35°	1	1	0.41
	41	1 5/8	2×7	5×9	35°	1	1	0.42
Cross-type bit 	29	1 9/64	12×8		-	1	2	0.25
	30	1 3/16	12×8		-	1	2	0.26
	32	1 1/4	12×8		-	1	2	0.30
	33	1 19/64	12×8		-	1	2	0.32
	35	1 3/8	12×8		-	1	2	0.36
	36	1 27/64	12×8		-	1	2	0.39
	38	1 1/2	12×8		-	1	2	0.43
	41	1 5/8	14×8		-	1	2	0.49

Tapered Drilling Tools 11°

Drill rod	Length		Weight approx kg
	mm	Foot	
Hex.22mm Tapered rod,carburized	610	2'	2.2
	1220	4'	4.1
	1830	6'	5.9
	2000	6'7"	6.4
	2435	8'	7.8
	2600	8'8"	8.3
	3200	10'6"	10.1
	3655	12'	11.5
	4000	13'1"	12.6
	4800	15'9"	14.9
	5600	18'4"	17.4
	6400	21'	19.8
	7200	23'6"	22.2
	8000	26'2"	24.6