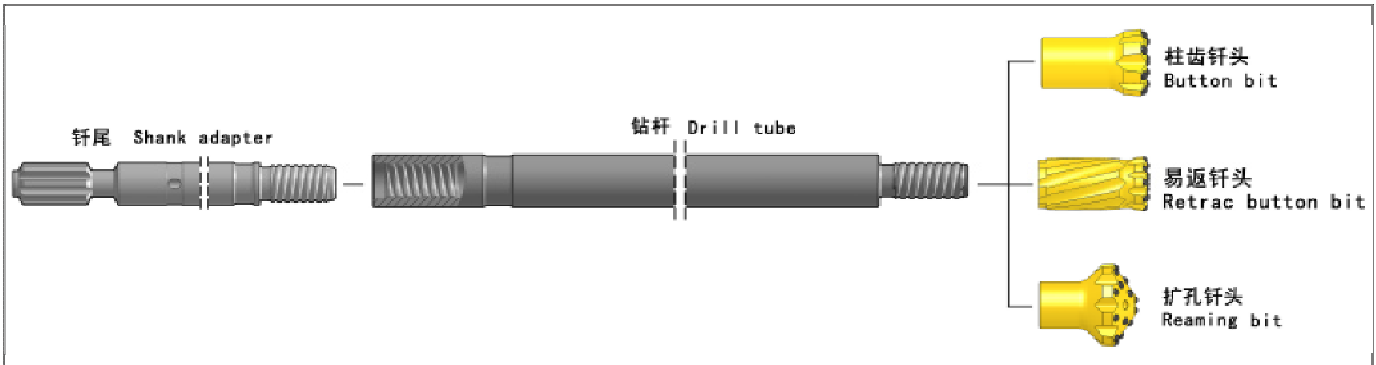
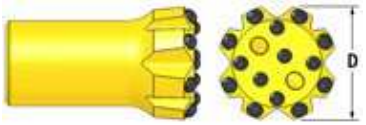

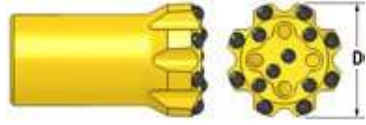

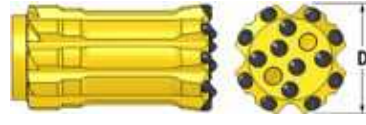

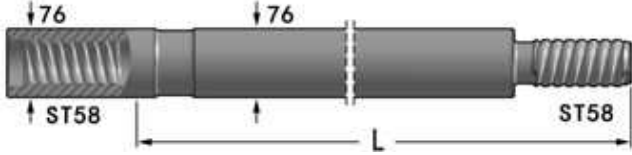


Tube drilling tools ST58



Drill bit	Diameter		No×button diameter			Flushing hole		Weight approx kg
	mm	inch	Front	Gauge	Angle	Front	Side	
Button bit   	Spherical buttons							
	89	3 1/2	6×12	8×12	35°	2	1	4.1
	89	3 1/2	6×13	8×13	35°	2	1	4.1
	89	3 1/2	4×13,1×13	8×13	35°	4	-	4.1
	89	3 1/2	4×12,2×12	8×12	35°	4	-	4.1
	95	3 3/4	4×13,1×13	8×14	35°	4	-	4.6
	102	4	6×14	8×14	35°	2	-	6.0
	102	4	6×13	8×16	35°	2	1	6.0
	115	4 1/2	6×14	8×16	35°	2	-	7.0
	Parabolic buttons							
	89	3 1/2	6×12	8×12	35°	2	1	4.1
	89	3 1/2	6×13	8×13	35°	2	1	4.1
	89	3 1/2	4×13,1×13	8×13	35°	4	-	4.1
	89	3 1/2	4×12,2×12	8×12	35°	4	-	4.1
95	3 3/4	4×13,1×13	8×14	35°	4	-	4.6	
102	4	6×14	8×14	35°	2	-	6.0	
102	4	6×13	8×16	35°	2	1	6.0	
115	4 1/2	6×14	8×16	35°	2	-	7.0	
Retrac button bit  	Spherical buttons							
	89	3 1/2	6×12	8×14	35°	2	1	5.1
	89	3 1/2	4×13,1×13	8×13	35°	4	-	5.1
	102	4	7×12	8×14	35°	2	1	6.5
	115	4 1/2	6×14	8×16	35°	2	-	8.5
	Parabolic buttons							
	89	3 1/2	6×12	8×14	35°	2	1	5.1
	89	3 1/2	4×13,1×13	8×13	35°	4	-	5.1
	102	4	7×12	8×14	35°	2	1	6.5
	115	4 1/2	6×14	8×16	35°	2	-	8.5

Tube drilling tools ST58

Drill bit	Diameter		Noxbutton diameter			Flushing hole		Weight approx kg
	mm	inch	Front	Gauge	Angle	Front	Side	
Reaming bit 	Spherical buttons							
	152	6	6×16	9×16	35°	3	-	13.0
	152	6	2×14	18×14	35°	3	3	10.4
	Parabolic buttons							
	152	6	6×16	9×16	35°	3	-	13.0
	152	6	2×14	18×14	35°	3	3	10.4
Drill rod	Length		Diameter		Weight approx kg			
	mm	Foot	mm	inch				
Drill tube, Flushing hole 26mm. 	1525	5'	76	2 3/8	34.0			
	1830	6'	76	2 3/8	40.0			
	3660	12'	76	2 3/8	76.3			